

Auxiliary Power Supplies

SINGLE PHASE

60 Hertz





DUAL POWER SOURCE

- (1) Industrial Control Transformer
- (1) Shielded Control Transformer
- Fused Primary & Secondary Circuit
- Ventilated NEMA-1 Construction

" PDL D " Series							
Primary		480		Approx. Dimensions (in Inches)			Weight (in lbs.)
Secondary		120					
Control VA	Shielded VA	Catalog Number		A = Height	B = Width	C = Depth	
750	1000	PDL D-23		10.50	23.00	10.00	65
1000	1000	PDL D-33		10.50	23.00	10.00	70
750	2000	PDL D-25		10.50	23.00	10.00	80
1000	2000	PDL D-35		10.50	23.00	10.00	85
750	3000	PDL D-26		10.50	23.00	10.00	90
1000	3000	PDL D-36		10.50	23.00	10.00	95

Note: Add " DR & IL " to the Catalog Number for a **Duplex Receptacle** & **Indicating Light** (ie. PDL D-23-DR-IL)

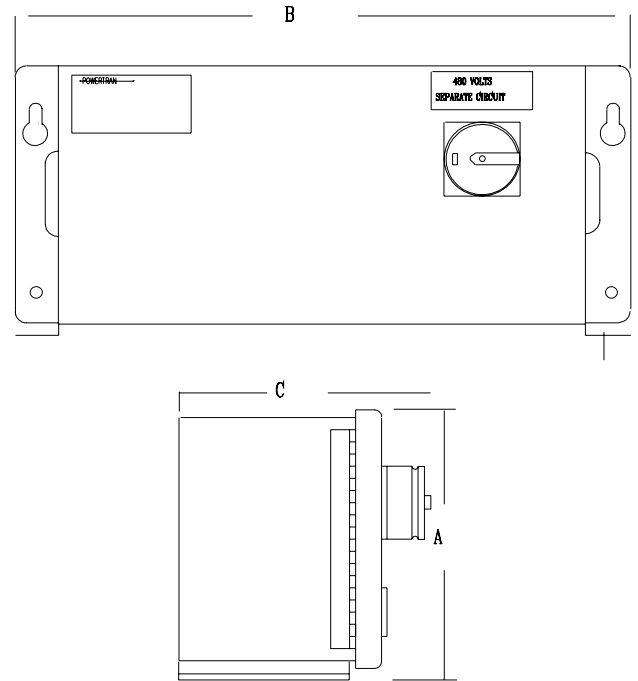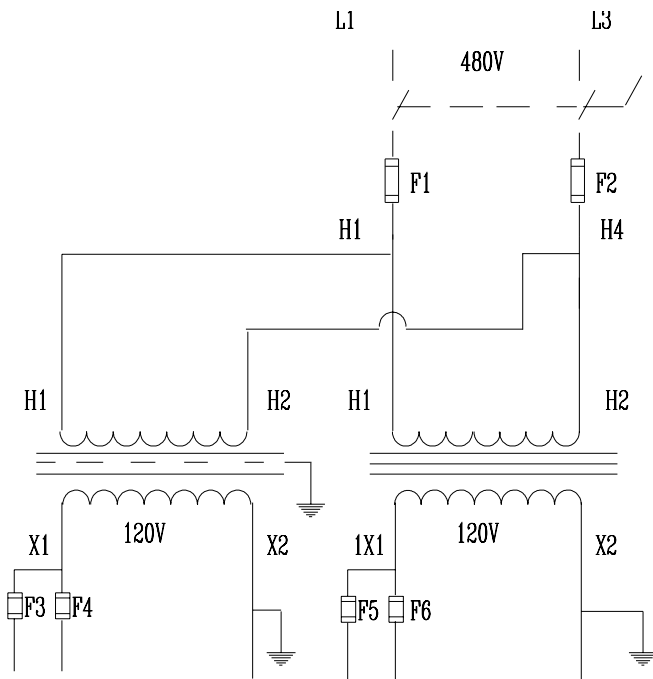

Disconnects with any other features and/or voltage combinations are available upon request.