

Auxiliary Power Supplies

SINGLE PHASE

60 Hertz





STANDARD POWER SOURCE
 Industrial Control Transformer
 Fused Primary & Secondary Circuit
 Duplex Receptacle (on 1000VA & Larger)
 Ventilated NEMA-1 Construction



" PLD " Series							
Primary	480	Approx. Dimensions (in Inches)			Weight (in lbs.)		
Secondary	120	VA Size	Catalog Number	A = Height		B = Width	C = Depth
		250	PLD-250-NR	10.50	14.00	8.00	45
		500	PLD-500-NR	10.50	14.00	8.00	45
		750	PLD-750-NR	10.50	14.00	8.00	50
		1000	PLD-1000	10.50	14.00	8.00	50
		1500	PLD-1500	10.50	14.00	8.00	55
		2000	PLD-2000	10.50	14.00	8.00	60

Note: Add "S" to the Catalog Number for a **Shielded Transformer** (ie. PLDS-1000)

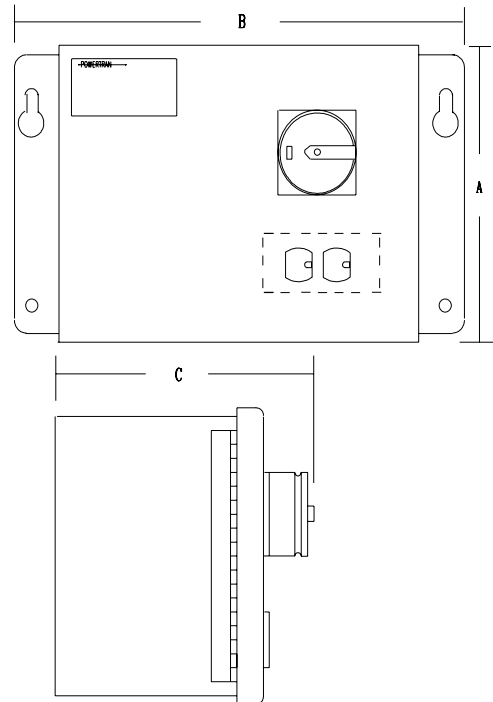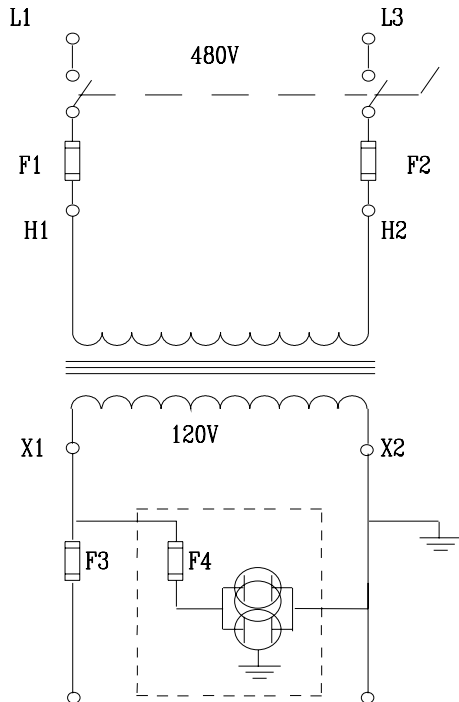

Disconnects with any other features and/or voltage combinations are available upon request.