

# Auxiliary Power Supplies



## THREE PHASE

60 Hertz

### INDUSTRIAL POWER SOURCE





Shielded Isolation Transformer  
Fused Primary & Secondary Circuit  
( 3 ) Indicating Lights  
Dustproof NEMA-12 Construction



### " PLDN3 " Series

Primary	480 Delta	Approx. Dimensions ( in Inches )			Weight ( in lbs. )
Secondary	230Y/133	A = Height	B = Width	C = Depth	
<b>KVA Size</b>	<b>Catalog Number</b>				
5.0	PLDN3-5K	13.50	16.00	13.50	130
7.5	PLDN3-7.5K	13.50	16.00	13.50	180
10.0	PLDN3-10K	18.50	21.00	13.50	215

Note: The Primary Voltage includes ( 1 ) 5.0% FCAN and ( 1 ) 5.0% FCBN Tap

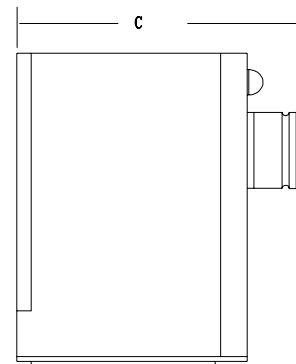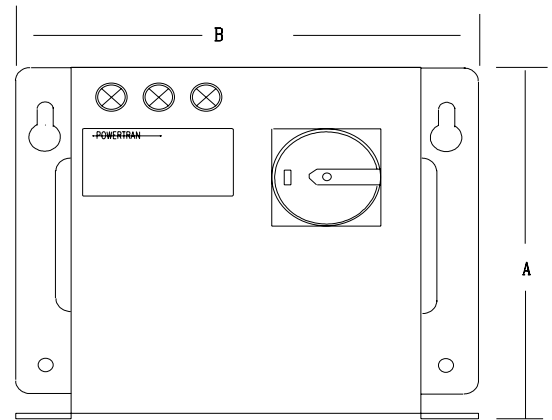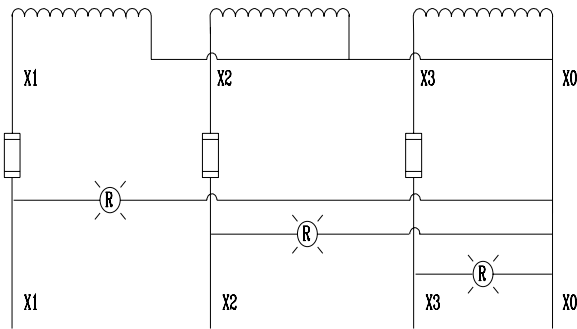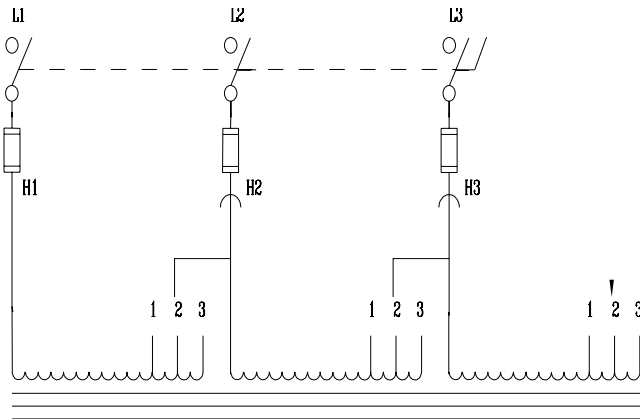

Disconnects with any other features and/or voltage combinations are available upon request.