

# Constant Voltage Transformers

## SINGLE PHASE


60 Hertz

### CLT SERIES


Hard-Wired Primary & Secondary  
 Input Voltage Allowance +10% to -20%  
 Output Voltage Regulation +/- 3%  
 Ventilated NEMA-1 Construction  
 Indoor Installations

Primary	120 / 208 / 240 / 480	Approx. Dimensions ( in Inches )			Enclosure Style	Weight ( in lbs. )
Secondary	120 / 208 / 240	A = Height	B = Width	C = Depth		
VA Size	Catalog Number	A = Height	B = Width	C = Depth	Enclosure Style	Weight ( in lbs. )
250	CLT-0250-GTB	6.00	4.50	10.00	Wall	23
500	CLT-0500-GTB	6.50	6.50	12.50	Wall	36
750	CLT-0750-GTB	6.50	6.50	13.50	Wall	42
1000	CLT-1000-GTB	8.50	6.50	14.50	Wall	53
1500	CLT-1500-GTB	9.50	10.00	17.50	Wall	81
2000	CLT-2000-GTB	9.50	10.00	18.50	Wall	97
3000	CLT-3000-GTB	9.50	10.00	20.00	Wall	142
5000	CLT-5000-GTO	40.00	19.00	21.75	Floor	353
7500	CLT-7500-RTO	40.00	19.00	21.75	Floor	422
10000	CLT-1001-RTO	40.00	19.00	21.75	Floor	496
15000	CLT-1501-RTO	40.00	19.00	21.75	Floor	635

Enclosure for **140-3000 VA**

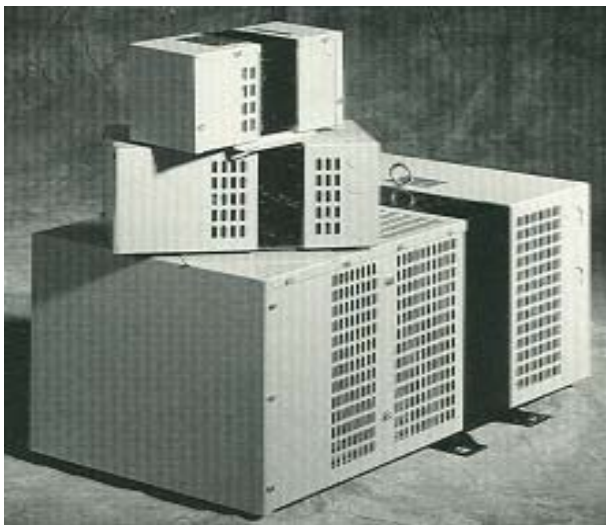

Enclosure for **5-15 KVA**

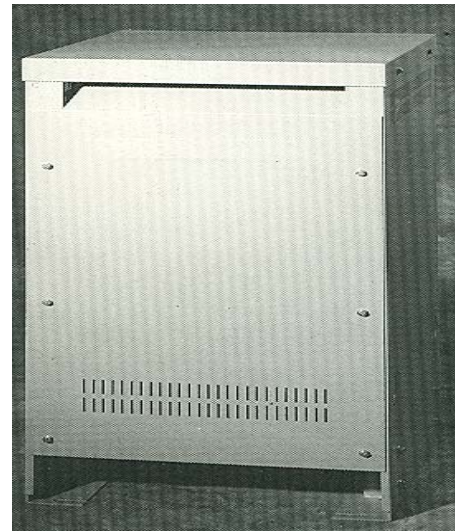

Transformers with any other KVA ratings and/or voltage combinations are available upon request.



[www.powertran.com](http://www.powertran.com)

**POWERTRAN**  
**TRANSFORMERS**

Phone 248-399-4300 Fax 248-399-1018