

Custom Core & Coil Transformers

SINGLE PHASE



INDUSTRIAL CONTROL TRANSFORMER

Primary = Custom

Secondary = Custom

Frequency = 60 Hz (50 Hz Available)

Temperature Rise = 115°C (55°C Available)

Construction = Open w/Finger Safe Terminals




Primary	Custom
Secondary	Custom

Approx. Dimensions (in Inches)

Accessories

VA Size	Catalog Number	A	B	C	D	E	Weight (in lbs.)	Primary Finger-Safe Terminals	Secondary Finger-Safe Terminals
500	F - - - FST500	5.88	4.50	6.38	3.88	3.75	13.0	Included	Included
750	F - - - FST750	5.50	5.25	6.75	3.63	4.38	17.0	Included	Included
1000	F - - - FST1000	6.63	5.25	6.75	3.75	4.38	23.0	Included	Included
1500	F - - - FST1500	6.00	6.38	7.63	4.12	5.31	29.0	Included	Included
2000	F - - - FST2000	6.50	6.38	7.63	4.63	5.31	34.0	Included	Included
2500	F - - - FST2500	6.50	7.50	8.75	4.75	6.00	48.0	Included	Included
3000	F - - - FST3000	6.50	7.50	8.75	4.75	6.00	50.0	Included	Included
4000	F - - - FST4000	6.38	9.00	11.25	3.88	7.00	65.0	Included	Included
5000	F - - - FST5000	6.38	9.00	11.25	3.88	7.00	68.0	Included	Included
6000	F - - - FST6000	7.50	9.00	11.25	5.00	7.00	82.0	Included	Included
7500	F - - - FST7500	7.50	9.00	11.25	5.00	7.00	84.0	Included	Included
10000	F - - - FST10000	8.25	9.00	11.25	5.75	7.00	95.0	Included	Included
15000	F - - - FST15000	8.00	12.00	13.25	6.00	9.00	125.0	Included	Included

Note: For Transformers with **CE Certification**, please consult Factory

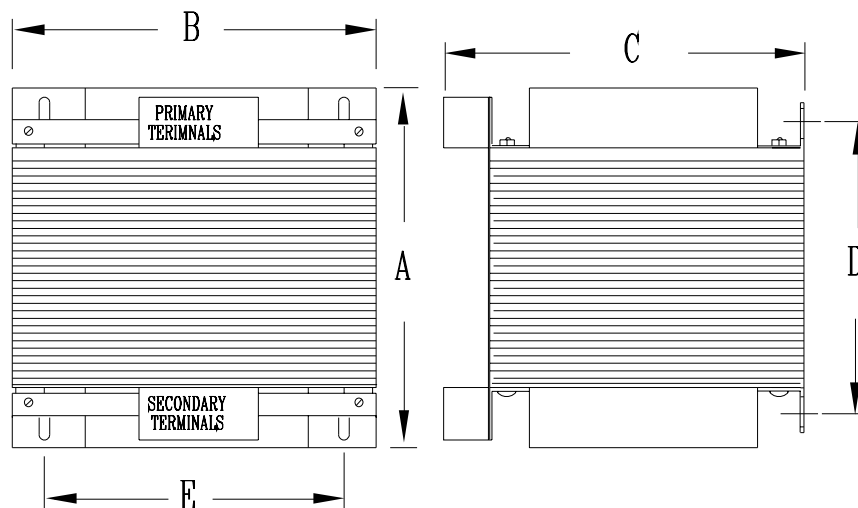

Transformers with any other KVA ratings and/or voltage combinations are available upon request.