

# Custom Ventilated Transformers

## SINGLE PHASE



### ISOLATION TRANSFORMER


Primary = Custom  
 Secondary = Custom  
 Frequency = 60 Hz ( 50 Hz Available )  
 Temperature Rise = 150°C ( 115°C Available )  
 Construction = NEMA-1 ( NEMA-3R Available )



Primary	Custom	Approx. Dimensions ( in Inches )			Weight ( in lbs. )
Secondary	Custom	A	B	C	
KVA Size	Catalog Number				
15	PTN _ _ _ -15K-EE	33.00	17.00	18.50	195
25	PTN _ _ _ -25K-EE	33.00	17.00	18.50	225
37	PTN _ _ _ -37K-EE	37.00	22.50	20.00	355
50	PTN _ _ _ -50K-EE	37.00	22.50	20.00	505
75	PTN _ _ _ -75K-EE	52.00	25.50	23.00	615
100	PTN _ _ _ -100K-EE	52.00	25.50	23.00	825
167	PTN _ _ _ -167K-EE	60.00	33.50	26.00	995

Note: Transformers highlighted in **RED** indicate **NEMA TP-1 & Energy Efficient** Construction

Note: For Transformers with **CE Certification**, please consult Factory

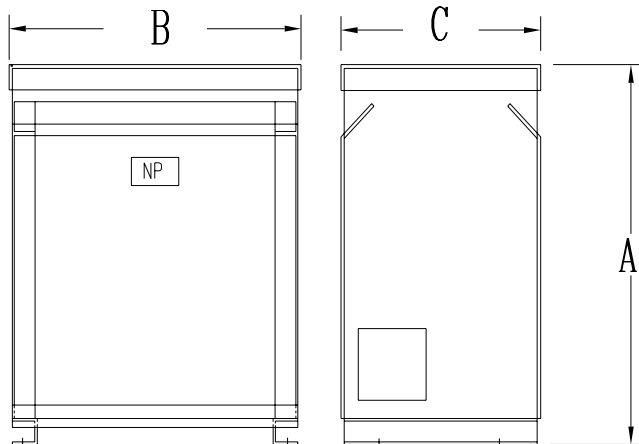

Transformers with any other KVA ratings and/or voltage combinations are available upon request.



[www.powertran.com](http://www.powertran.com)

**POWERTRAN**  
**TRANSFORMERS**

Phone 248-399-4300 Fax 248-399-1018