

Custom Core & Coil Transformers

SINGLE PHASE

ISOLATION TRANSFORMER

Primary = Custom

Secondary = Custom

Frequency = 60 Hz (50 Hz Available)

Temp. Rise = 150°C (115°C Available)


Construction = Bus-Bar Terminals



Primary		Secondary		Approx. Dimensions (in Inches)			Accessories		
Custom		Custom		A	B	C	Weight (in lbs.)	Primary Bus-Bar Terminals	Secondary Bus-Bar Terminals
KVA Size	Catalog Number								
15	PTN ___ -15K-EE-CC	18.06	15.75	13.75	135	Standard	Standard		
25	PTN ___ -25K-EE-CC	18.06	15.75	14.75	185	Standard	Standard		
37	PTN ___ -37K-EE-CC	21.50	21.25	14.00	275	Standard	Standard		
50	PTN ___ -50K-EE-CC	23.32	21.25	14.63	295	Standard	Standard		
75	PTN ___ -75K-EE-CC *	42.13	23.88	14.88	440	Standard	Standard		
100	PTN ___ -100K-EE-CC *	45.38	23.88	15.88	645	Standard	Standard		
167	PTN ___ -167K-EE-CC *	52.13	31.88	18.50	840	Standard	Standard		

Note: Transformers highlighted in **RED** indicate **NEMA TP-1 & Energy Efficient** Construction

Note: For Transformers with **CE Certification**, please consult Factory

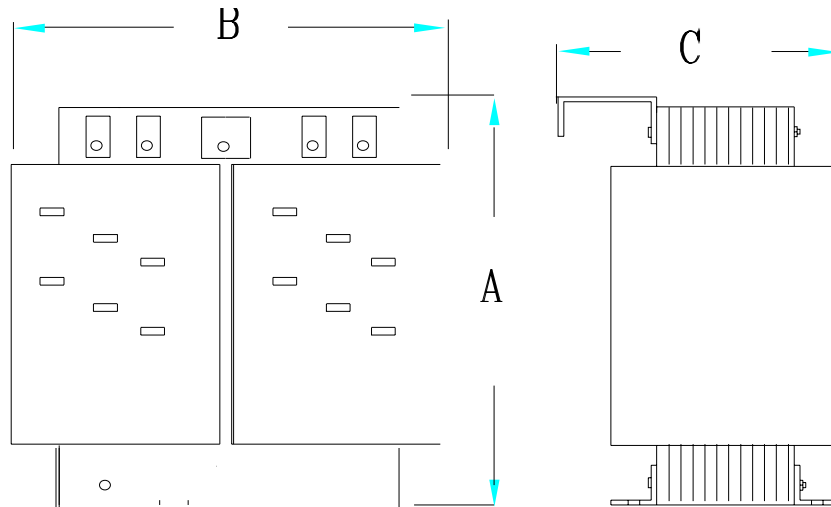

* = Terminals are located at the Bottom of the Coil (versus at the Top)

Transformers with any other KVA ratings and/or voltage combinations are available upon request.