

Open Industrial Control Transformers

SINGLE PHASE

60 Hertz

MACHINE TOOL TRANSFORMER

Primary = 240 x 480

Secondary = 120


Molded Terminals

Encapsulated Windings



Primary		240 x 480		Dimensions (in Inches)				Accessories	
Secondary		120						Primary Fuse Block	Low-Profile Terminal Covers
VA	Catalog Number	A	B	C	D	E	Weight (in lbs.)		
50	B050BTZ13JK	3.78	3.00	3.14	1.96	2.50	3.0	TPTC-1006-1	TPTC-1011-A
100	B100BTZ13JK	4.03	3.38	3.46	2.42	2.82	5.0	TPTC-1006-1	TPTC-1011-A
150	B150BTZ13JKF	4.03	3.75	3.77	2.82	3.13	6.0	TPTC-1006-1	TPTC-1011-A
250	B250BTZ13JKF	4.38	4.50	4.40	2.82	3.75	10.0	TPTC-1006-1	TPTC-1011-A
350	B350BTZ13JKF	4.75	4.50	4.40	3.75	3.75	14.0	TPTC-1006-1	TPTC-1011-A
500	B500BTZ13JKF	6.11	5.25	5.14	3.88	4.38	16.0	TPTC-1006-1	TPTC-1012-A
750	B750BTZ13JKF	7.61	5.25	5.14	5.38	4.38	28.0	TPTC-1006-1	TPTC-1012-A
1000	B1K0BTZ13JKF	6.11	6.75	6.30	3.91	6.13	30.0	TPTC-1006-1	TPTC-1012-A
1500	B1K5BTZ13JKF	8.11	6.75	6.32	6.12	6.13	50.0	TPTC-1006-1	TPTC-1012-A
2000	B2K0BTZ13JKH	7.75	6.75	6.28	4.97	6.13	46.0	TPTC-1006-1	TPTC-1002-A
3000	B3K0BTZ13JXH	8.06	9.00	7.50	5.25	7.50	56.0	TPTC-1006-1	TPTC-1002-A
5000	B5K0BTZ13JXH	10.38	9.00	7.50	7.56	7.50	85.0	TPTC-1006-1	TPTC-1002-A


Note: For Transformers with **CE Certification**, please consult Factory

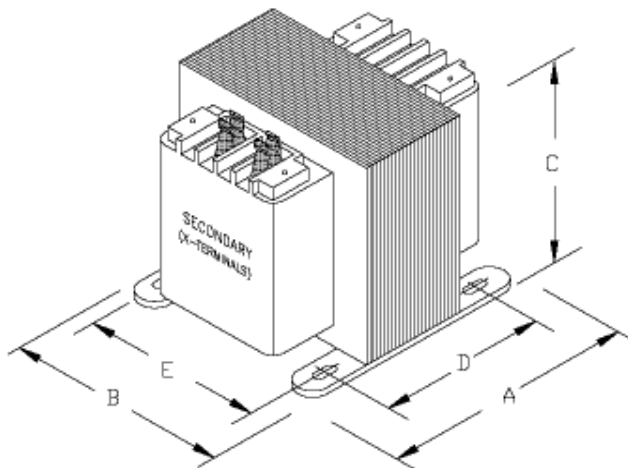

- Secondary Fuse Clips:
Accommodates 13/32" x 1 1/2" Fuses
Add (if used) a Maximum of 0.50" to **C** dimension



- IP-20 Terminal Covers:
Snaps onto Primary and/or Secondary Terminals
Provides a Finger-Safe Level of Protection to Electricians



- Primary Fuse Block:
Accommodates Class "CC" Rejection Fuses
Add (if used) a Maximum of 1.375" to **C** dimension



www.powertran.com

POWERTRAN
TRANSFORMERS

Phone 248-399-4300 Fax 248-399-1018