

General Purpose Isolation Transformers

SINGLE PHASE

60 Hertz

TRANSFORMERS (10 KVA & Below)

(0) 2½% FCAN & (0) 2½% FCBN Taps
 115°C Temperature Rise
 180°C Insulation System
 Encapsulated NEMA-3R Construction
 Indoor / Outdoor Installations


TRANSFORMERS (15 KVA & Above)

(2) 2½% FCAN & (4) 2½% FCBN Taps
 150°C Temperature Rise
 220°C Insulation System
 Ventilated NEMA-2 Construction
 Indoor Installations (or Add W/S for Outdoor)


Primary	600	Approx. Dimensions (in Inches)			Outdoor Weather Shield	Terminal Lugs Kit	Weight (in lbs.)
Secondary	120 / 240	A = Height	B = Width	C = Depth			
KVA Size	Catalog Number						
1.00	PT600-1K	11.25	5.25	6.50	N / R	N / A	28
1.50	PT600-1.5K	13.25	6.25	7.75	N / R	N / A	45
2.00	PT600-2K	13.25	6.25	7.75	N / R	N / A	50
3.00	PT600-3K	13.25	6.25	7.75	N / R	N / A	60
5.00	PT600-5K	15.00	10.18	10.63	N / R	N / A	110
7.50	PT600-7.5K	15.00	10.18	10.63	N / R	N / A	150
10.00	PT600-10K	17.00	13.18	13.12	N / R	N / A	175
15.00	PTN600-15K-EE	33.00	16.63	18.38	WS-3	LUG-1	165
25.00	PTN600-25K-EE	33.00	16.63	18.38	WS-3	LUG-1	190
37.50	PTN600-37.5K-EE	37.00	22.38	19.88	WS-4	LUG-1	300
50.00	PTN600-50K-EE	37.00	22.38	19.88	WS-4	LUG-2	335
75.00	PTN600-75K-EE	52.00	25.38	23.00	WS-7	LUG-2	490
100.00	PTN600-100K-EE	52.00	25.38	23.00	WS-7	LUG-3	610
167.00	PTN600-167K-EE	60.00	33.38	26.00	WS-9	LUG-3	895

Note: Transformers highlighted in **RED** indicate **NEMA TP-1 & Energy Efficient** Construction


Enclosure for 1-3 KVA

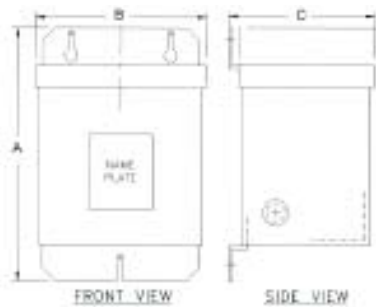

Enclosure for 5-10 KVA

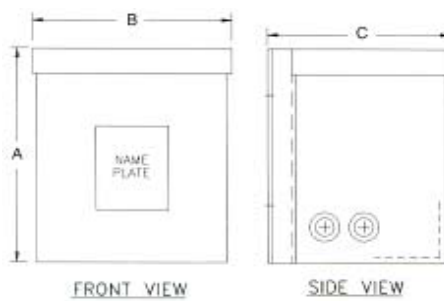

Enclosure for 15-167 KVA

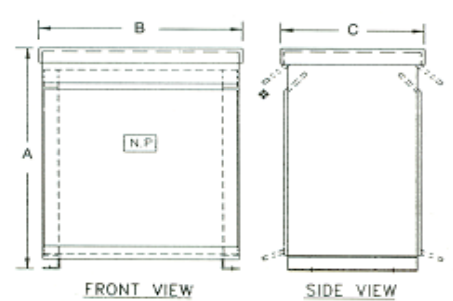

Transformers with any other KVA ratings and/or voltage combinations are available upon request.



www.powertran.com

POWERTRAN
TRANSFORMERS

Phone 248-399-4300 Fax 248-399-1018