

Custom Ventilated Transformers

THREE PHASE




ISOLATION TRANSFORMER

Primary = Custom
 Secondary = Custom
 Frequency = 60 Hz (50 Hz Available)
 Temperature Rise = 150°C (115°C Available)
 Construction = NEMA-1 (NEMA-3R Available)

Primary	Custom	Approx. Dimensions (in Inches)			Weight (in lbs.)
Secondary	Custom	A	B	C	
KVA Size	Catalog Number				
15	3PTN _ _ _ -15K-EE	29.00	17.50	19.50	210
30	3PTN _ _ _ -30K-EE	34.00	22.50	20.00	370
37	3PTN _ _ _ -37K-EE	34.00	22.50	20.00	385
45	3PTN _ _ _ -45K-EE	34.00	22.50	20.00	400
50	3PTN _ _ _ -50K-EE	34.00	22.50	20.00	505
75	3PTN _ _ _ -75K-EE	37.00	26.00	20.00	575
112	3PTN _ _ _ -112K-EE	43.00	28.50	23.50	760
150	3PTN _ _ _ -150K-EE	44.50	39.00	23.00	1105
225	3PTN _ _ _ -225K-EE	51.00	42.50	26.00	1385
300	3PTN _ _ _ -300K-EE	63.00	46.50	31.00	1695
500	3PTN _ _ _ -500K-EE	73.00	53.50	37.00	2405

Note: Transformers highlighted in **RED** indicate **NEMA TP-1 & Energy Efficient** Construction

Note: For Transformers with **CE Certification**, please consult Factory

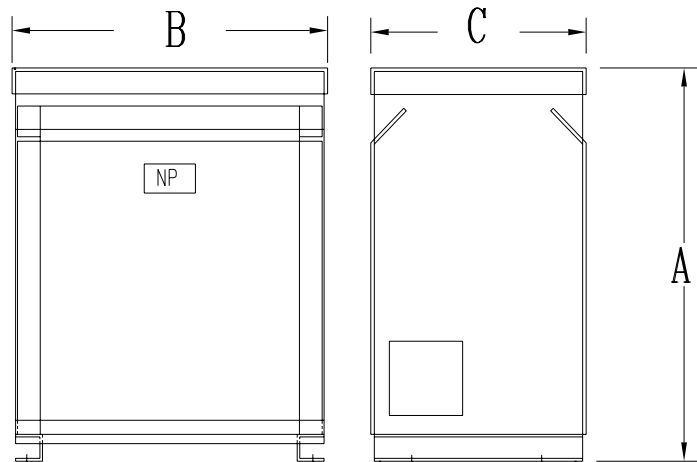

Transformers with any other KVA ratings and/or voltage combinations are available upon request.



www.powertran.com

POWERTRAN
TRANSFORMERS

Phone 248-399-4300 Fax 248-399-1018