

# Custom Encapsulated Transformers

## THREE PHASE




### ISOLATION TRANSFORMER

Primary = Custom  
 Secondary = Custom  
 Frequency = 60 Hz ( 50 Hz Available )  
 Temperature Rise = 115°C  
 Construction = NEMA-3R ( NEMA-12 Available )




Primary	Custom	Approx. Dimensions ( in Inches )				Weight ( in lbs. )	
Secondary	Custom	KVA Size	Catalog Number	Height	Width	Depth	Weight
		5	3EF - - - L5	15.25	12.50	8.75	155
		10	3EF - - - L10	16.00	19.25	8.75	220
		15	3EF - - - L15	25.25	17.75	11.50	245
		20	3EF - - - L20	25.25	17.75	11.50	330
		25	3EF - - - L25	25.25	17.75	11.50	460
		30	3EF - - - L30	25.25	17.75	11.50	525
		40	3EF - - - L40	27.50	30.00	15.00	615
		45	3EF - - - L45	27.50	30.00	15.00	690


Note: For Transformers with **CE Certification**, please consult Factory




Right & Left Side Brackets

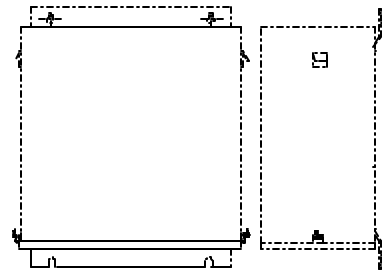

Top & Bottom Brackets



Extended Floor Brackets

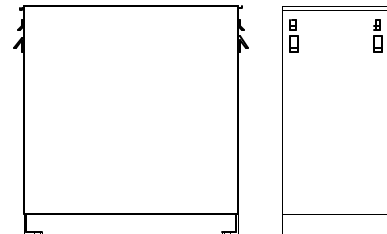

Internal Floor Brackets

Transformers with any other KVA ratings and/or voltage combinations are available upon request.