

Custom Core & Coil Transformers

THREE PHASE



ISOLATION TRANSFORMER

Primary = Custom
 Secondary = Custom
 Frequency = 60 Hz (50 Hz Available)
 Temperature Rise = 150°C (115°C Available)
 Construction = Finger-Safe Terminals




Primary	Custom
Secondary	Custom

Approx. Dimensions (in Inches)

Accessories

VA Size	Catalog Number	A	B	C	Weight (in lbs.)	Primary Finger-Safe Terminals	Secondary Finger-Safe Terminals
250	3A - - - FST50	7.50	7.50	4.25	20	Standard	Standard
500	3A - - - FST500	7.50	7.50	5.00	25	Standard	Standard
750	3F - - - FST750	9.00	9.00	4.50	35	Standard	Standard
1000	3F - - - FST1	9.00	9.00	4.50	40	Standard	Standard
1500	3F - - - FST1.5	9.00	9.00	4.50	45	Standard	Standard
2000	3F - - - FST2	10.25	11.00	7.00	60	Standard	Standard
2500	3F - - - FST2.5	10.25	11.00	7.00	65	Standard	Standard
5000	3F - - - FST5	10.25	11.00	7.00	75	Standard	Standard
7500	3F - - - FST7.5	13.00	15.00	6.38	95	Standard	Standard
10000	3F - - - FST10	13.00	15.00	6.38	115	Standard	Standard
15000	3F - - - FST15	15.75	19.75	8.00	155	Standard	Standard

Note: For Transformers with **CE Certification**, please consult Factory

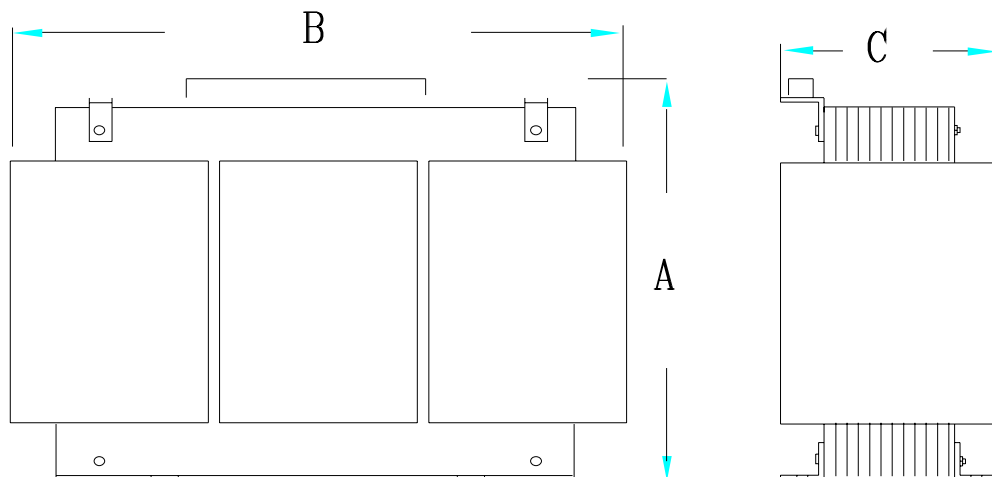

Transformers with any other KVA ratings and/or voltage combinations are available upon request.