



**NOTES:**

1. ALL UNITS ARE DESIGNED IN ACCORDANCE WITH INDUSTRY STANDARDS.
2. TRANSFORMERS ARE DRY-TYPE, CLASS AA, VENTILATED NEMA 2 ENCLOSED FOR INDOOR USE.
3. TRANSFORMERS ARE FLOOR MOUNTED.
4. AVAILABLE ACCESSORIES FOR THIS UNIT:  
A) OUTDOOR WEATHERSHIELD KIT
5. TRANSFORMERS ARE CONSTRUCTED BASED UPON A 40°C AMBIENT ENVIRONMENT.
6. MAINTAIN 1" CLEARANCE FROM ALL LIVE PARTS.
7. PAINT COLOR IS ANSI #61.

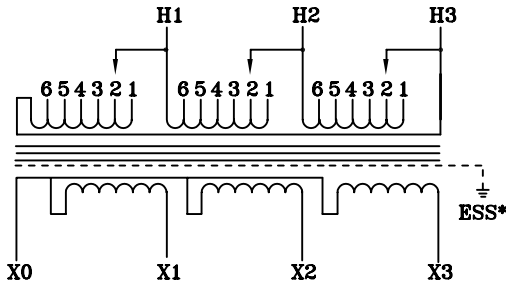


TYPICAL WIRING DIAGRAM

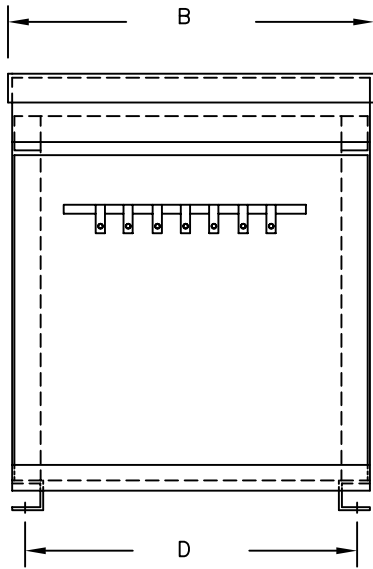

FRONT VIEW



SIDE VIEW

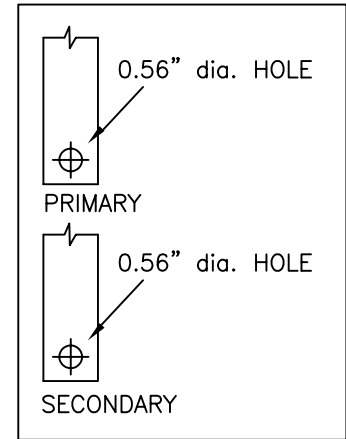

TERMINAL DETAILS

**APPROXIMATE DIMENSIONS ( INCHES )**

| KVA   | A     | B     | C     | D     | E     | F    | G    | H    | J    | K     | L    | BOX      | lbs. | WEATHER SHIELD | LUG KIT |
|-------|-------|-------|-------|-------|-------|------|------|------|------|-------|------|----------|------|----------------|---------|
| 150.0 | 46.00 | 32.00 | 28.00 | 30.25 | 24.75 | ---- | ---- | ---- | ---- | 32.12 | ---- | 3PT-150K | 1180 | WS-10B         | LUG-3   |

\* ELECTROSTATIC SHIELD GROUNDED TO TRANSFORMER CASE AT FACTORY ( IF APPLICABLE )

DRAWINGS  
 APPROVAL  
 RECORD  
 OTHER

|                        |  |         |            |  |  |
|------------------------|--|---------|------------|--|--|
| PRIMARY VOLTAGE        | 480 DELTA  | CUST.   | XXXXXXXXXX |  |  |
| SECONDARY VOLTAGE      | 208Y/120   | JOB     |            |  |  |
| TEMPERATURE RISE IN °C | 150  | CATALOG |            |  |  |
| WINDINGS & TERMINALS   | <input checked="" type="checkbox"/> ALUMINUM <input type="checkbox"/> COPPER | NOTE    | XXXXXXXXXX |  |  |
| FREQUENCY IN HERTZ     | 60   | BY      | ENG. LOG.  | 3-PHASE, 600 VOLT CLASS ISOLATION DRY TYPE TRANSFORMER |  |
| PRIMARY TAPS           | 432, 444, 456, 468, 492, 504   | DATE    |            |  |  |
|                        |  | REV     | MFG. LOG.  | DWG. NO.   |  |
|                        |  | DATE:   | DWG. FILE  | 3PTN40-150K-EE   |  |