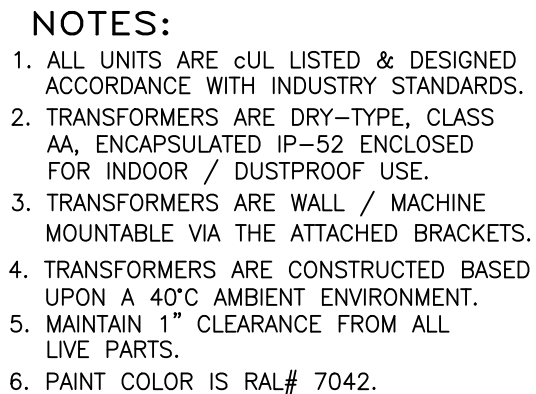


* ELECTROSTATIC SHIELD GROUNDED TO TRANSFORMER CASE AT FACTORY (IF APPLICABLE)

PRIMARY VOLTAGE	190-200-208-220-240 x 380-400-415-440-480		CUST. XXXXXXXX		
SECONDARY VOLTAGE	120 x 240		JOB		
TEMPERATURE RISE IN °C	115		CATALOG		
WINDINGS & TERMINALS	☐ ALUMINUM	☒ COPPER	NOTE ELECTROSTATICALLY SHIELDED, CE MARKED		
FREQUENCY IN HERTZ	50/60		BY	ENG. LOG.	TITLE 1-PHASE, 600 VOLT CLASS ISOLATION DRY TYPE TRANSFORMER
PRIMARY TAPS	NONE		DATE		
			REV	MFG. LOG.	DWG. NO.
			DATE:	DWG. FILE	PCE-1-5K-050-IP52