


TYPICAL WIRING DIAGRAM


NOTES:

1. ALL UNITS ARE cUL LISTED AND DESIGNED ACCORDANCE WITH INDUSTRY STANDARDS.
2. TRANSFORMERS ARE DRY-TYPE, CLASS AA, VENTILATED NEMA 2 ENCLOSED FOR INDOOR USE.
3. TRANSFORMERS ARE FLOOR MOUNTED.
4. AVAILABLE ACCESSORIES FOR THIS UNIT:
A) OUTDOOR WEATHERSHIELD KIT
B) WALL MOUNTING BRACKETS
5. TRANSFORMERS ARE CONSTRUCTED BASED UPON A 40°C AMBIENT ENVIRONMENT.
6. MAINTAIN 1" CLEARANCE FROM ALL LIVE PARTS.
7. PAINT COLOR IS ANSI #61.

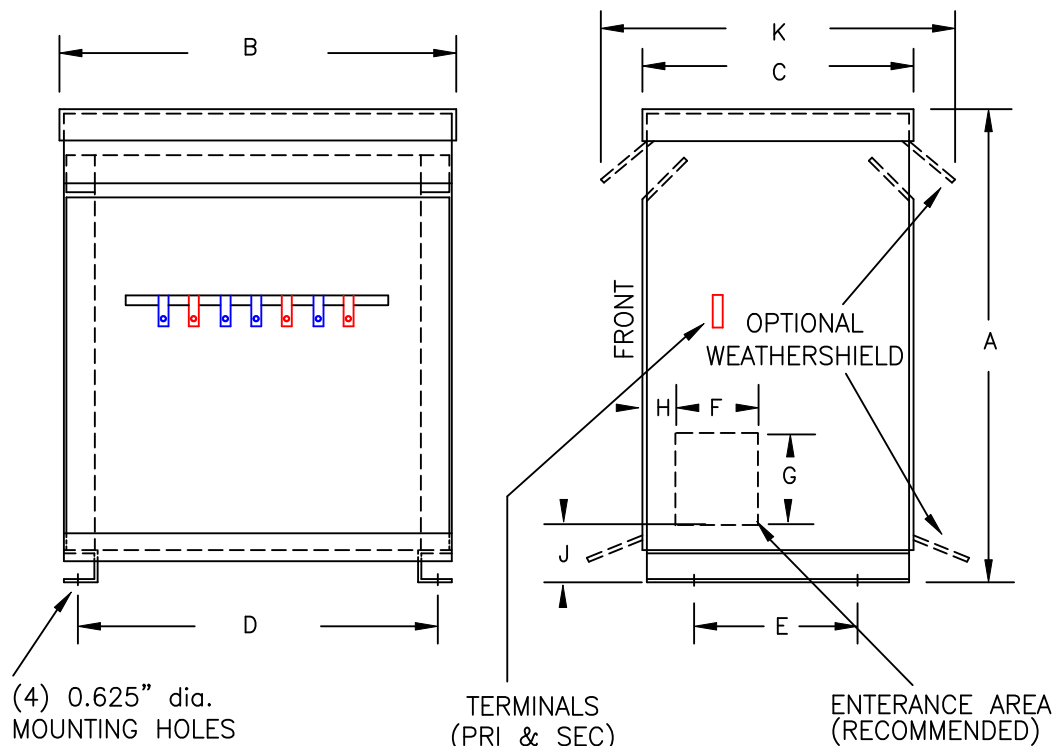

FRONT VIEW

SIDE VIEW

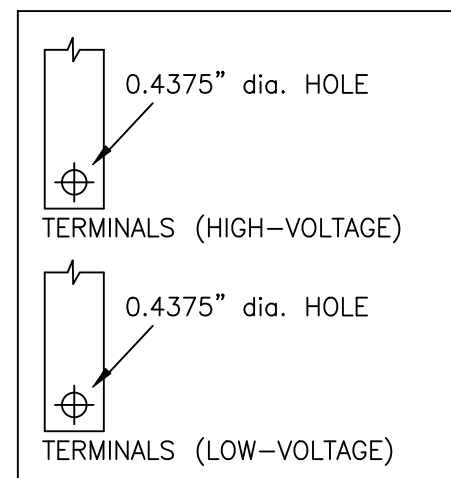

TERMINAL DETAILS

APPROXIMATE DIMENSIONS (INCHES)

KVA	A	B	C	D	E	F	G	H	J	K	L	BOX	lbs.	WEATHER SHIELD	TERMINAL TYPE
SEE BELOW	29.00	17.12	19.38	15.50	16.50	4.00	4.00	1.00	5.75	23.50	----	3PT-15K	185	WS-2	BUSBAR

										DRAWINGS ☒ APPROVAL ☐ RECORD ☐ OTHER	
	75.0 KVA		60.0 KVA								
INPUT VOLTAGE	575Y/332		480Y/277		CUST. XXXXXXXX						
OUTPUT VOLTAGE	480Y/277		400Y/231		JOB						
TEMPERATURE RISE IN °C	150				CATALOG						
WINDINGS & TERMINALS	☒ ALUMINUM	☐ COPPER		NOTE XXXXXXXX							
FREQUENCY IN HERTZ	60				BY	ENG. LOG.	TITLE 3-PHASE, 600 VOLT CLASS AUTO DRY TYPE TRANSFORMER				
INPUT TAPS	546, 560, 589, 604				DATE						
					REV	MFG. LOG.	DWG. NO. 3PT485PA75				
					DATE:	DWG. FILE					

DRAWINGS
☒ APPROVAL
☐ RECORD
☐ OTHER