



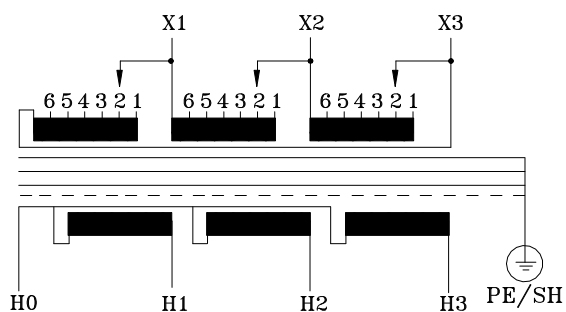

TYPICAL WIRING DIAGRAM


## NOTES:

1. ALL UNITS ARE cUL/CE LISTED & DESIGNED ACCORDANCE WITH INDUSTRY STANDARDS.
2. TRANSFORMERS ARE DRY-TYPE, CLASS AA, VENTILATED NEMA 2 ENCLOSED FOR INDOOR USE.
3. TRANSFORMERS ARE FLOOR MOUNTED.
4. AVAILABLE ACCESSORIES FOR THIS UNIT:  
A) OUTDOOR WEATHERSHIELD KIT  
B) WALL MOUNTING BRACKETS
5. TRANSFORMERS ARE CONSTRUCTED BASED UPON A 40°C AMBIENT ENVIRONMENT.
6. MAINTAIN 1" CLEARANCE FROM ALL LIVE PARTS.
7. PAINT COLOR IS ANSI #61.

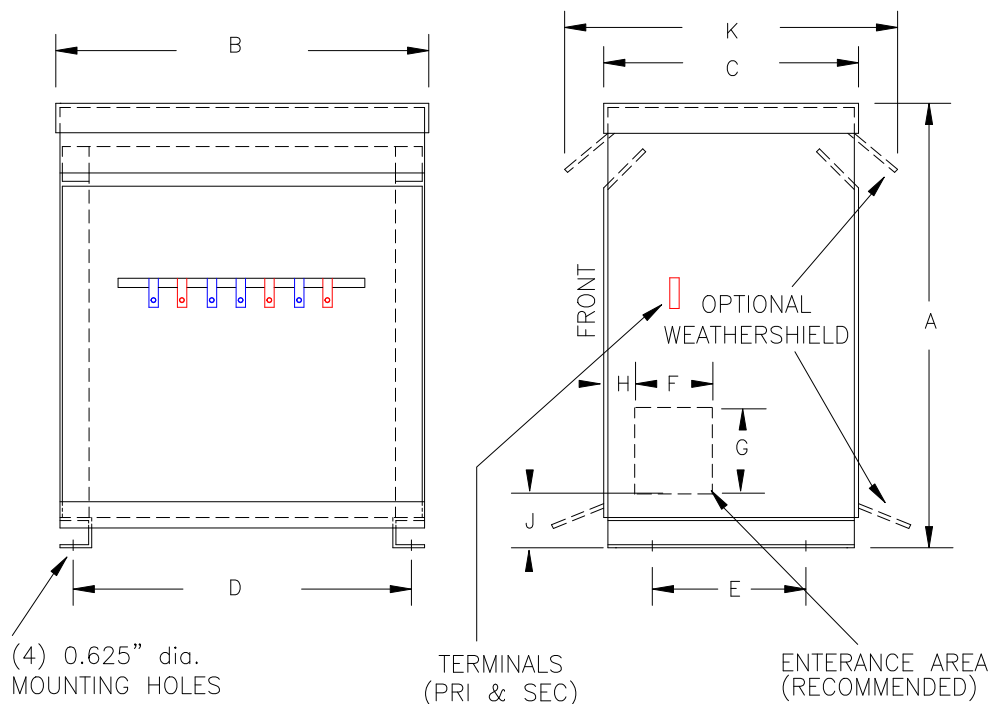

FRONT VIEW

SIDE VIEW

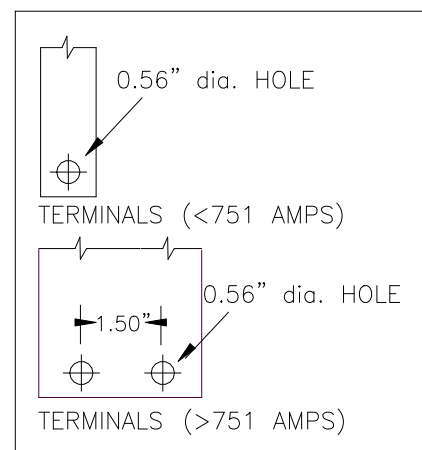

TERMINAL DETAILS

## APPROXIMATE DIMENSIONS ( INCHES )

| KVA   | A     | B     | C     | D     | E     | F    | G    | H    | J    | K     | L    | BOX     | lbs. | WEATHER SHIELD | TERMINAL TYPE |
|-------|-------|-------|-------|-------|-------|------|------|------|------|-------|------|---------|------|----------------|---------------|
| 15.0* | 34.00 | 22.38 | 19.88 | 20.75 | 16.50 | 4.00 | 4.00 | 1.00 | 5.75 | 24.00 | ---- | 3PT-30K | 285  | WS-4           | BUSBAR        |

\* ELECTROSTATIC SHIELD GROUNDED TO TRANSFORMER CASE AT FACTORY ( IF APPLICABLE )

DRAWINGS  
☒ APPROVAL  
☐ RECORD  
☐ OTHER

|                        |                                                                              |                    |                            |
|------------------------|------------------------------------------------------------------------------|--------------------|----------------------------|
| INPUT VOLTAGE          | 400 DELTA                                                                    | CUST.              | XXXXXXXXXX                 |
| OUTPUT VOLTAGE         | 480Y/277                                                                     | CATALOG            |                            |
| TEMPERATURE RISE IN °C | 150                                                                          | MACHINE            |                            |
| WINDINGS & TERMINALS   | <input checked="" type="checkbox"/> ALUMINUM <input type="checkbox"/> COPPER | NOTE               | ELECTROSTATICALLY SHIELDED |
| FREQUENCY IN HERTZ     | 50/60                                                                        | BY                 | ENG. LOG.                  |
| INPUT TAPS             | 360, 370, 380, 390, 410, 420                                                 | DATE               | TITLE                      |
|                        |                                                                              | REV                | MFG. LOG.                  |
|                        |                                                                              | DATE:              | DWG. FILE                  |
|                        |                                                                              | DWG. NO.           |                            |
|                        |                                                                              | PCE-3-15K-044-IP20 |                            |