



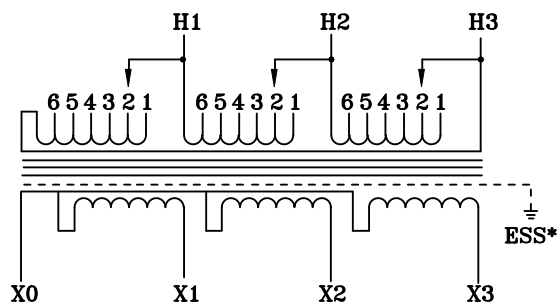


TYPICAL WIRING DIAGRAM

## NOTES:


1. ALL UNITS ARE cUL LISTED AND DESIGNED ACCORDANCE WITH INDUSTRY STANDARDS.
2. TRANSFORMERS ARE DRY-TYPE, CLASS AA, VENTILATED NEMA 2 ENCLOSED FOR INDOOR USE.
3. TRANSFORMERS ARE FLOOR MOUNTED.
4. AVAILABLE ACCESSORIES FOR THIS UNIT:  
A) OUTDOOR WEATHERSHIELD KIT  
B) WALL MOUNTING BRACKETS
5. TRANSFORMERS ARE CONSTRUCTED BASED UPON A 40°C AMBIENT ENVIRONMENT.
6. MAINTAIN 1" CLEARANCE FROM ALL LIVE PARTS.
7. PAINT COLOR IS ANSI #61.

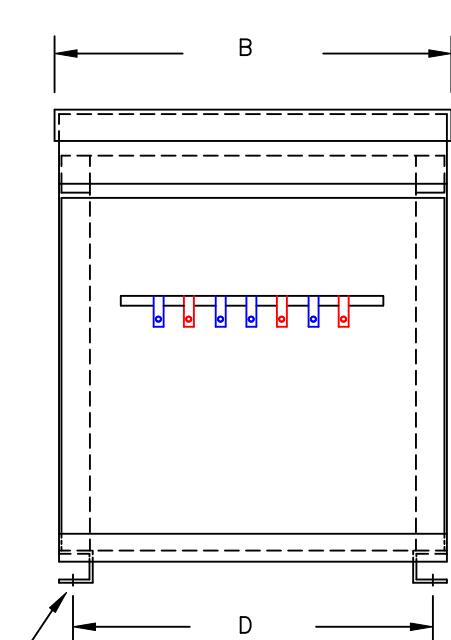

FRONT VIEW

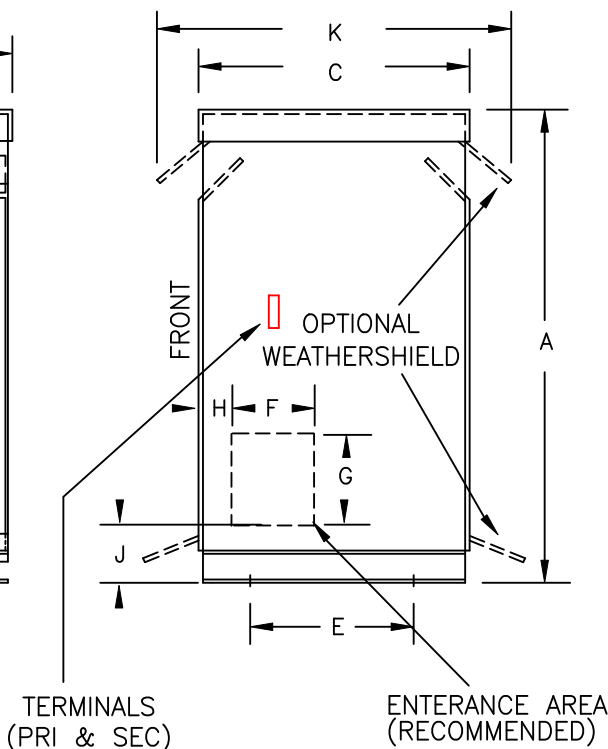

SIDE VIEW

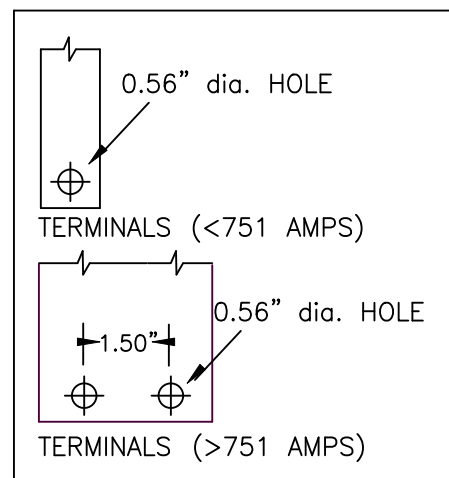

TERMINAL DETAILS

## APPROXIMATE DIMENSIONS ( INCHES )

| KVA   | A     | B     | C     | D     | E     | F    | G    | H    | J    | K     | L    | BOX      | lbs. | WEATHER SHIELD | TERMINAL TYPE |
|-------|-------|-------|-------|-------|-------|------|------|------|------|-------|------|----------|------|----------------|---------------|
| 112.5 | 43.00 | 28.50 | 23.50 | 26.63 | 20.25 | ---- | ---- | ---- | ---- | 27.63 | ---- | 3PT-112K | 675  | WS-18          | BUSBAR        |

\* ELECTROSTATIC SHIELD GROUNDED TO TRANSFORMER CASE AT FACTORY ( IF APPLICABLE )

DRAWINGS  
☒ APPROVAL  
☐ RECORD  
☐ OTHER

|                        |                                                                              |         |                                                              |
|------------------------|------------------------------------------------------------------------------|---------|--------------------------------------------------------------|
| PRIMARY VOLTAGE        | 208-240 DELTA                                                                | CUST.   | XXXXXXXXXX                                                   |
| SECONDARY VOLTAGE      | 200Y/115                                                                     | JOB     |                                                              |
| TEMPERATURE RISE IN °C | 150                                                                          | CATALOG |                                                              |
| WINDINGS & TERMINALS   | <input checked="" type="checkbox"/> ALUMINUM <input type="checkbox"/> COPPER | NOTE    | XXXXXXX                                                      |
| FREQUENCY IN HERTZ     | 60                                                                           | BY      | ENG. LOG.                                                    |
| PRIMARY TAPS           | 201, 214, 222, 228, 234, 247, 254                                            | DATE    | TITLE                                                        |
|                        |                                                                              | REV     | MFG. LOG.                                                    |
|                        |                                                                              | DATE:   | DWG. FILE                                                    |
|                        |                                                                              |         | DWG. NO.                                                     |
|                        |                                                                              |         | 3-PHASE, 600 VOLT CLASS<br>ISOLATION<br>DRY TYPE TRANSFORMER |
|                        |                                                                              |         | 3PTN814-112K-240                                             |

POWERTRAN