


NOTES:

- 1. ALL UNITS ARE CUL LISTED & DESIGNED ACCORDANCE WITH INDUSTRY STANDARDS.
- 2. TRANSFORMERS ARE DRY-TYPE, CLASS AA, ENCAPSULATED NEMA 12 ENCLOSED FOR INDOOR / DUSTPROOF USE.
- 3. TRANSFORMERS ARE WALL / MACHINE MOUNTABLE VIA THE ATTACHED BRACKETS.
- 4. TRANSFORMERS ARE CONSTRUCTED BASED UPON A 40°C AMBIENT ENVIRONMENT.

DRAWINGS X APPROVAL

- 5. MAINTAIN 1" CLEARANCE FROM ALL LIVE PARTS.
- 6. PAINT COLOR IS RAL# 7042.

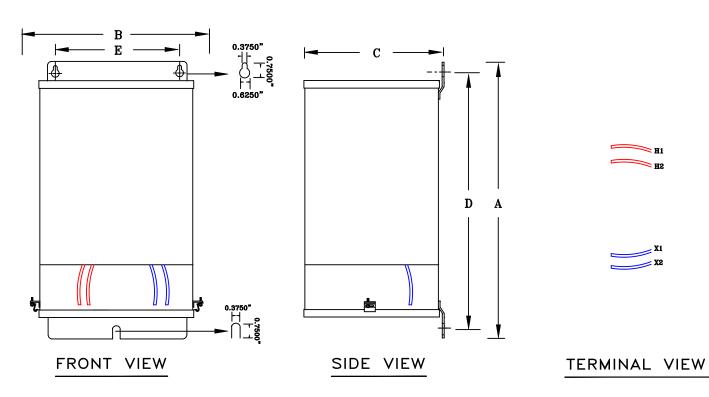

APPROXIMATE DIMENSIONS (INCHES)

KVA	А	В	С	D	E	F	HARDWARE	MTG SLOTS	ENCLOSURE	lbs.	WEATHER' SHIELD	TERMINAL TYPE
2.0	12.25	8.63	6.25	11.00	5.75		1/4-20	0.375" x 0.625"	N212-EX	55	N/A	LEADs

RECORD * ELECTROSTATIC SHIELD GROUNDED TO TRANSFORMER CASE AT FACTORY (IF APPLICABLE) □ OTHER PRIMARY CUST. 480 XXXXXXX VOLTAGE SECONDARY JOB 230 VOLTAGE TEMPERATURE RISE IN °C 115 **CATALOG** WINDINGS & XXXXXXX **COPPER ALUMINUM** NOTE TERMINALS **FREQUENCY** BY ENG. LOG. TITLE 1-PHASE, 600 VOLT CLASS 60 IN HERTZ **ISOLATION** PRIMARY DATE DRY TYPE TRANSFORMER NONE TAPS MFG. LOG. DWG. NO. **REV** NF081L2000 DWG. FILE

DATE: