


## NOTES:

- 1. ALL UNITS ARE CUL LISTED & DESIGNED ACCORDANCE WITH INDUSTRY STANDARDS.
- 2. TRANSFORMERS ARE DRY-TYPE, CLASS AA, ENCAPSULATED NEMA 12 ENCLOSED FOR INDOOR / DUSTPROOF USE.
- 3. TRANSFORMERS ARE WALL / MACHINE MOUNTABLE VIA THE ATTACHED BRACKETS.
- 4. TRANSFORMERS ARE CONSTRUCTED BASED UPON A 40°C AMBIENT ENVIRONMENT.

H2 нз

> **DRAWINGS** X APPROVAL RECORD

- 5. MAINTAIN 1" CLEARANCE FROM ALL LIVE PARTS.
- 6. PAINT COLOR IS RAL# 7042.

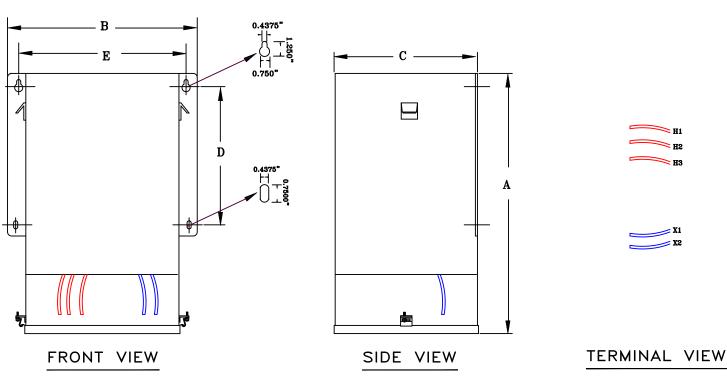

## APPROXIMATE DIMENSIONS ( INCHES )

KVA	А	В	С	D	E	F	HARDWARE	MTG SLOTS	ENCLOSURE	lbs.	WEATHER' SHIELD	TERMINAL TYPE
10.0	15.25	12.38	9.00	8.50	11.25		3/8-16	0.437" x 0.750"	N10	145	N/A	LEADs

st ELECTROSTATIC SHIELD GROUNDED TO TRANSFORMER CASE AT FACTORY ( IF APPLICABLE ) CUST. 208-240 XXXXXXX

□ OTHER PRIMARY VOLTAGE SECONDARY JOB 230 VOLTAGE TEMPERATURE 115 **CATALOG** RISE IN C WINDINGS & **COPPER ALUMINUM** NOTE IMPORTED MACHINERY ( HOT, NEU, GRD ) TERMINALS **FREQUENCY** BY ENG. LOG. TITLE 1-PHASE, 600 VOLT CLASS 60 IN HERTZ **ISOLATION** PRIMARY DATE DRY TYPE TRANSFORMER NONE TAPS MFG. LOG. DWG. NO. REV NF905L10 DWG. FILE DATE: