



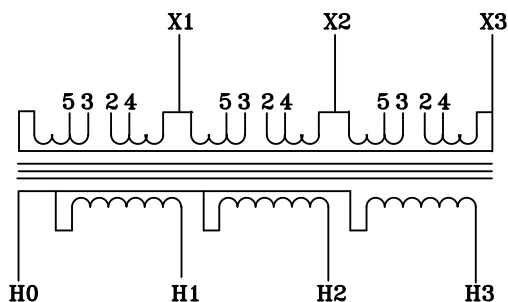


TYPICAL WIRING DIAGRAM

## NOTES:


1. ALL UNITS ARE cUL LISTED AND DESIGNED ACCORDANCE WITH INDUSTRY STANDARDS.
2. TRANSFORMERS ARE DRY-TYPE, CLASS AA, VENTILATED NEMA 1 ENCLOSED FOR INDOOR USE.
3. TRANSFORMERS ARE FLOOR MOUNTED.
4. TRANSFORMERS ARE CONSTRUCTED BASED UPON A 40°C AMBIENT ENVIRONMENT.
5. MAINTAIN 1" CLEARANCE FROM ALL LIVE PARTS.
6. PAINT COLOR IS ANSI #61.

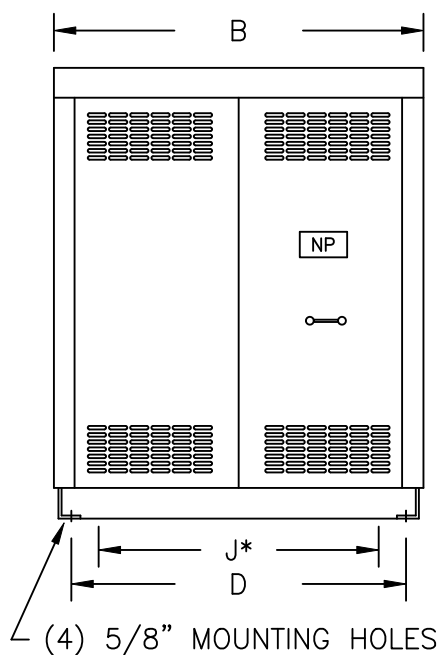

FRONT VIEW

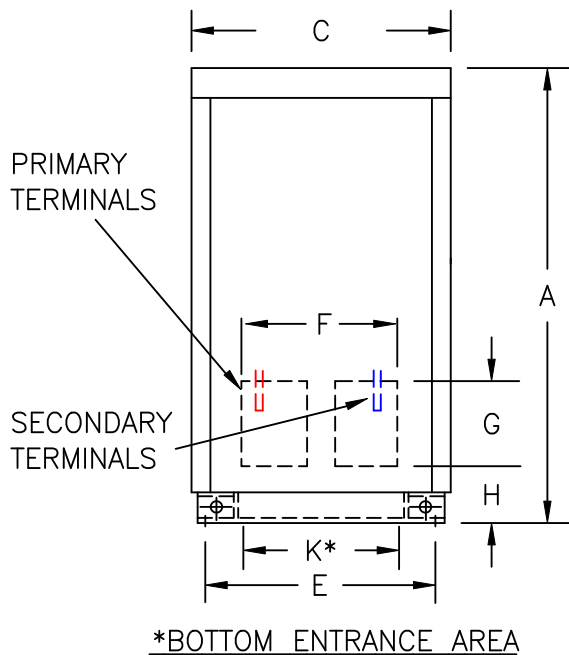

SIDE VIEW

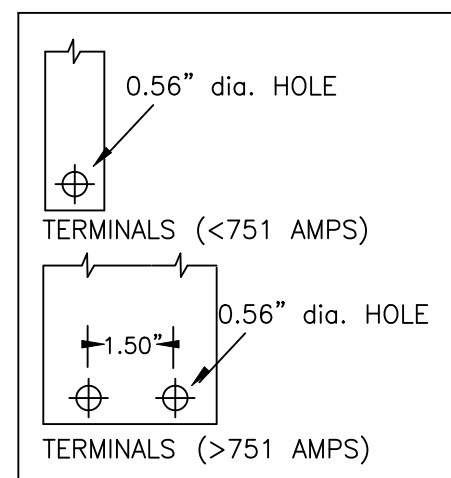

TERMINAL DETAILS

## APPROXIMATE DIMENSIONS ( INCHES )

| KVA   | A     | B     | C     | D     | E     | F     | G     | H    | J     | K     | L    | BOX | lbs. | WEATHER SHIELD | TERMINAL TYPE |
|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|-------|------|-----|------|----------------|---------------|
| 275.0 | 55.25 | 44.38 | 27.25 | 36.63 | 25.00 | 20.25 | 10.00 | 3.75 | 34.50 | 21.00 | ---- | 2-P | 1450 | N/A            | BUSBAR        |

\* ELECTROSTATIC SHIELD GROUNDED TO TRANSFORMER CASE AT FACTORY ( IF APPLICABLE )

DRAWINGS  
☒ APPROVAL  
☐ RECORD  
☐ OTHER

|                        |                                                                              |                                                                    |            |
|------------------------|------------------------------------------------------------------------------|--------------------------------------------------------------------|------------|
| PRIMARY VOLTAGE        | 208 DELTA                                                                    | CUST.                                                              | XXXXXXXXXX |
| SECONDARY VOLTAGE      | 460Y/266                                                                     | JOB                                                                |            |
| TEMPERATURE RISE IN °C | 150                                                                          | CATALOG                                                            |            |
| WINDINGS & TERMINALS   | <input checked="" type="checkbox"/> ALUMINUM <input type="checkbox"/> COPPER | NOTE                                                               | XXXXXXX    |
| FREQUENCY IN HERTZ     | 60                                                                           | BY                                                                 | ENG. LOG.  |
| PRIMARY TAPS           | 198, 218                                                                     | DATE                                                               | TITLE      |
|                        |                                                                              | REV                                                                | MFG. LOG.  |
|                        |                                                                              | DATE:                                                              | DWG. FILE  |
|                        |                                                                              | DWG. NO.                                                           |            |
|                        |                                                                              | 3-PHASE, 600 VOLT CLASS<br>DRIVE ISOLATION<br>DRY TYPE TRANSFORMER |            |
|                        |                                                                              | 3PTN384-275K-DIT                                                   |            |

POWERTRAN